




CITY OF IRVINE PUBLIC WORKS

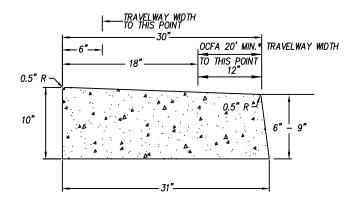


1" - 4" SHED CURB



4" FLARED CURB



2" FLARED CURB



6" FLARED CURB

Note:

- 1. Curb cores will not be allowed. Yard drains must connect directly to the underground storm drain system.
- 2. Asphalt concrete pavement shall be maximum 3/8" higher than edge of gutter.
- 3. 4" and 6" flared curb shall not be used for Private Courts.
- * 28' minimum travelway width in very high fire hazard severity zones (OCFA)

PRIVATE COURT/WAY CURB AND GUTTER

M/ Caus

MARK CARROLL, R.C.E. 31515 CITY OF IRVINE - CITY ENGINEER OCTOBER 2012 DATE STD. PLAN 200A

SHEET 1 OF 1