


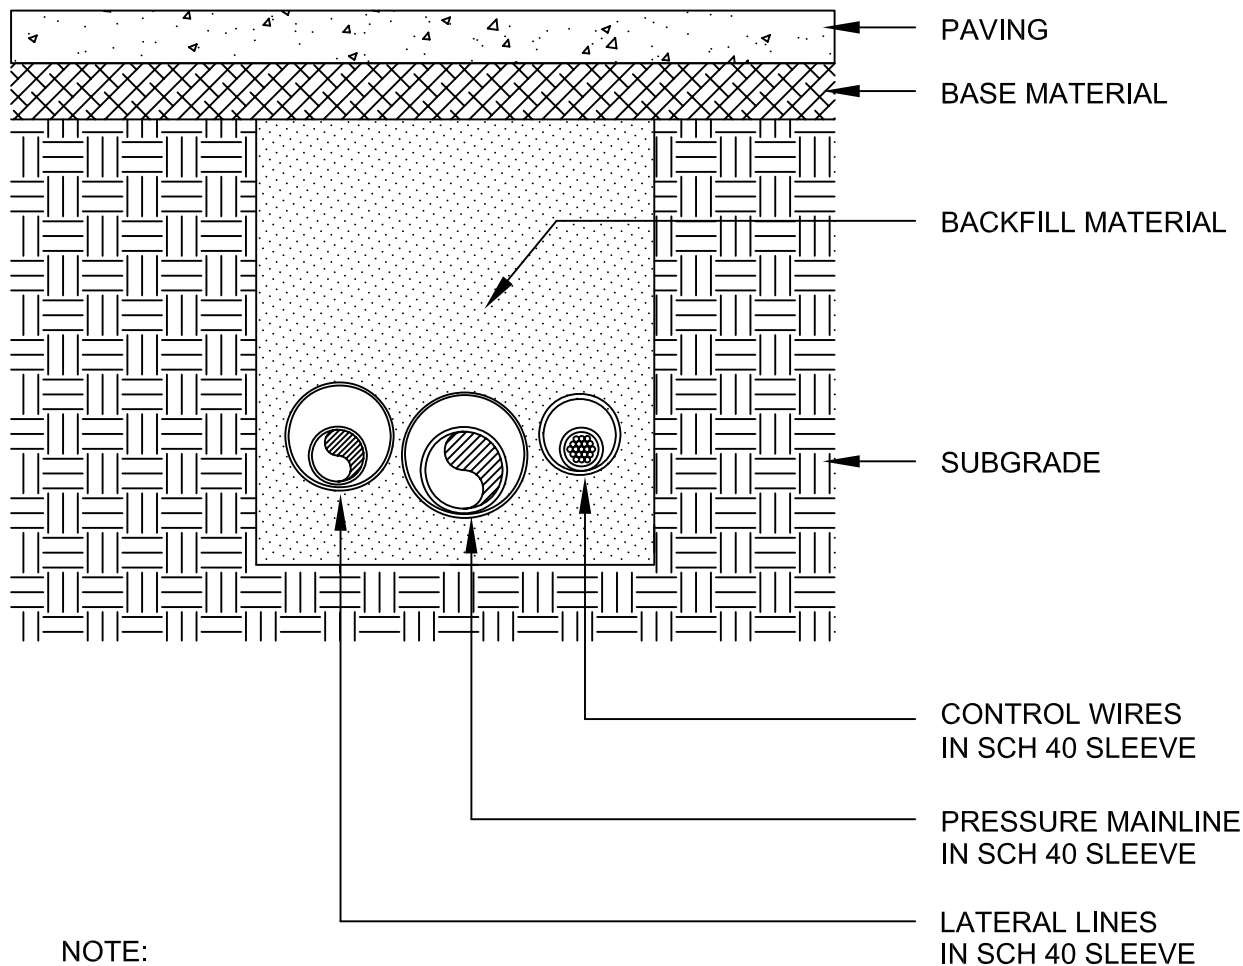

NOTE:

ALL PIPING TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS' INSTALLATION SPECIFICATIONS.

ALL MAINLINE, LATERAL LINES, AND CONTROL WIRES SHALL BE SLEEVED BELOW ALL HARDSCAPE ELEMENTS WITH SCH 40 PVC, 2 TIMES THE DIAMETER OF THE PIPE OR WIRE BUNDLE WITHIN.

DEPTH OF SLEEVES, BACKFILL, AND COMPACTION OF TRENCH SHALL BE IN ACCORDANCE WITH STANDARD PLAN NO. 223 FOR CROSSINGS OF STREETS AND SHALL BE IN ACCORDANCE WITH STANDARD PLAN NO. 500 FOR CROSSINGS OF PARKING LOTS, SIDEWALKS, OR OTHER HARDSCAPE ELEMENTS.

HORIZONTAL DIMENSION BETWEEN SLEEVES SHALL BE A MINIMUM OF 4 INCHES.

©Copyright 2000 Global Digi-tech, LLC - The pictorial and graphic expressions displayed with this work are copyrighted under the laws of the United States and shall be used only on projects under the jurisdiction of the agency listed below.

REVISIONS	CITY OF IRVINE	STANDARD PLAN NO.
	SLEEVE TRENCHING	501
	 Approved by: Mark L. Carroll R.C.E. 31515 City Engineer	Sheet 1 of 1
	Date: 6-22-09	